


## KAON

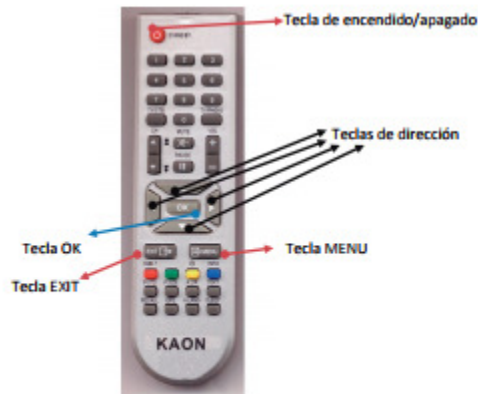

- \* Press the MENU key
- \* Scroll down with the arrow keys to SETUP. OF THE SYSTEM press OK
- \* If a MENU LOCK CARD appears? Press 0000 (four zeros)
- \* Select the FACTORY RESTORE option and confirm YES with OK The decoder will reboot:

1- MENU LANGUAGE ENGLISH OK

2- AUDIO LANGUAGE ENGLISH OK

3- SUBTITLE LANGUAGE ENGLISH OK

4- LOCAL TIME GMT + 1 OK

5- SEARCHING CHANNELS, selecting auto search OK

The channel search configuration should be this:

START FREQUENCY 474000

END FREQUENCY 862000

SYMBOLS 6900 SEARCH NETWORK ON

\* Press OK to start the search.

\* When finished, the FINISHED POST poster is displayed, press OK

\* To EXIT THE MENU press OK

\* To SAVE THE CHANNELS press OK